




GERMANY

02.39

**IN STEEL SHEET CASE
FOR FRONT PANEL MOUNTING WITH
3-HOLE FRONT FLANGE
(WITHOUT BIMETAL COMPENSATION)**

LEITENBERGER

Mess- und Regeltechnik GmbH
Bahnhofstraße 32/33
D-72138 Kirchentellinsfurt
Fon: +49 (0)7121/908-0
Fax: +49 (0)7121/908-200
E-Mail: mrt-info@leitenberger.de

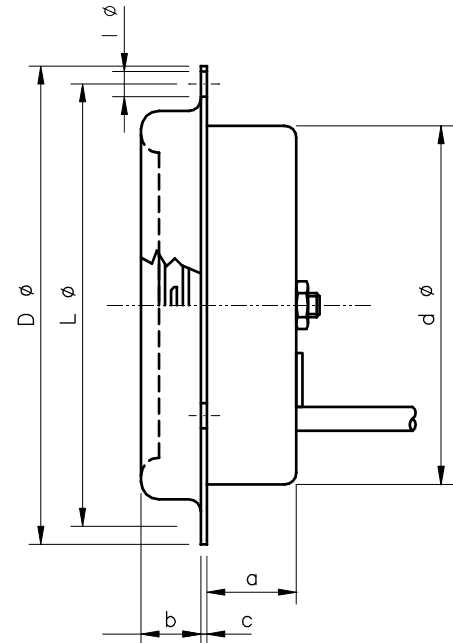

Type	a	b	c	d	D	I	L
1052 F/fs	0.94	0.14	0.12	2.17	3.15	0.17	2.91
1060 F/fs	0.59	0.35	0.02	2.36	3.15	0.17	2.91
1080 F/fs	0.51	0.47	0.02	3.15	4.13	0.17	3.78
1100 F/fs	1.18	0.31	0.03	4.02	5.2	0.18	4.57

Unit: Inch

- Case: steel sheet corrosion protected
- Mounting: Front panel mounting with 3-hole front flange
- Window: glass, resistant up to 65 °C or 149 °F
- Front flange: NG 52 - ABS, verchromed
NG 80 and 160 - steel chromed
NG 60 and 100 - stainless steel polished
- Measuring system: soft single bourdon spring (370) system without bimetal compensation
- Scale: white - black prints
- scale length: approx. 240 [°]
- Graduation: 1°, 2°, 5°, 10° depending on range
- Range: between -80 ... +380 °C
-112 ... +716 °F
- Accuracy: class 2 acc. DIN 16203
- Pointer: black
- Capillary connection: back
- Options:
 - customized dial
 - coloured scale
 - drag pointer

