



## 02.03 IN STEEL SHEET CASE FOR FRONT PANEL MOUNTING WITH 3-HOLE FRONT FLANGE

### LEITENBERGER

Mess- und Regeltechnik GmbH


Bahnhofstraße 32/33

D-72138 Kirchentellinsfurt

Fon: +49 (0)7121/908-0

Fax: +49 (0)7121/908-200

E-Mail: mrt-info@leitenberger.de

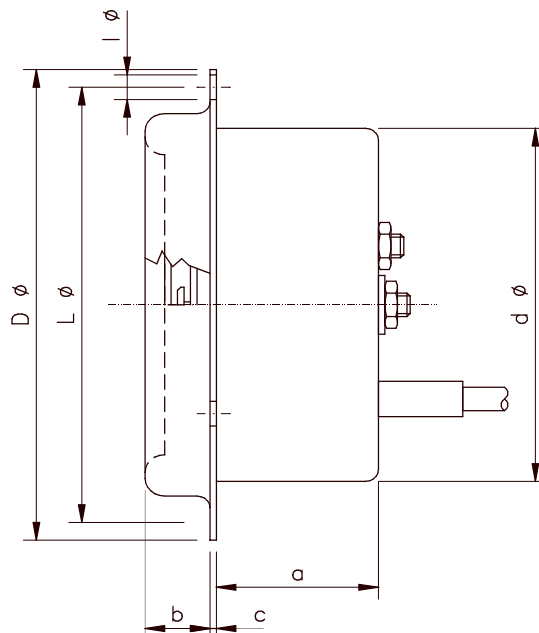

Type	a	b	c	d	D	I	L
1052 F	0.98	0.35	0.02	2.05	3.15	0.17	2.91
1060 F	0.98	0.35	0.02	2.36	3.15	0.17	2.91
1080 F	0.87	0.47	0.02	3.15	4.13	0.17	3.78
1100 F	1.18	0.31	0.03	4.02	5.2	0.18	4.57
1160 F	1.77	0.14	0.12	6.3	7.56	0.23	7.01

Unit: Inch

- |                       |   |
|-----------------------|---|
| Case:                 | steel sheet corrosion protected   |
| Mounting:             | Front Panel Mounting wit 3-hole front flange  |
| Window:               | glass, resistant up to 65 °C or 149 °F  |
| Front flange:         | NG 52 - ABS, verchromed<br>NG 80 and 160 - steel chromed<br>NG 60 and 100 - stainless steel polished  |
| Measuring system:     | double bourdon spring system with bimetal compensation  |
| Scale:                | white - black prints  |
| Scale length:         | approx. 270 <sup>°</sup>  |
| Graduation:           | 1°, 2°, 5°, 10° depending on range  |
| Range:                | between -80 ... +380 °C<br>-112 ... +716 °F   |
| Accuracy:             | class 2 acc. DIN 16203  |
| Pointer:              | black   |
| Capillary connection: | back  |
| Options:              | - customized dial<br>- coloured scale<br>- class 1.0, class1.5<br>- drag pointer<br>- back adjustment |

