



## PRESSURE GAUGES TYPE MX

### LEITENBERGER

Mess- und Regeltechnik GmbH



Bahnhofstraße 32/33

D-72138 Kirchentellinsfurt

Fon: +49 (0)7121/908-0

Fax: +49 (0)7121/908-200

E-Mail: mrt-info@leitenberger.de

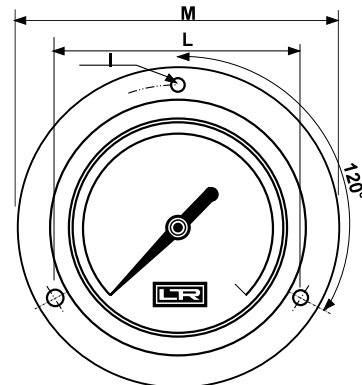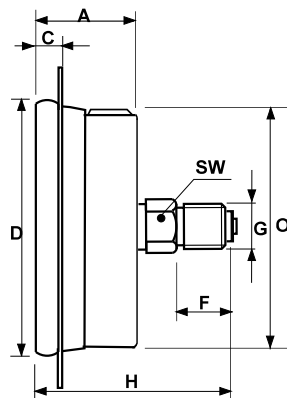

Type	NG	A	C	D	F	G	H	I	L	M	O	SW
MX6F	2.48	1.14	0.29	2.69	0.51	1/4 SAE	2.36	0.18	2.95	3.33	2.52	0.55

Unit: Inch

- Case: steel, PVC coated, black
- Window: plexiglass
- Ring: steel, PVC coated, black
- Socket: 1/4 SAE or 1/8 NPT, back, OT 58 brass
- Elastic element: phosphor bronze
- Movement: gearing, OT 59 brass
- Dial: white
- Pointer: black oxidized aluminium
- Range: High: -1/+38 bar / Low: -1/+18 bar  
High: 14,50/500 psi / Low: 14,50/260 psi
- Accuracy: cl. 1,6
- Ambient-T: +15 / +65°C / +59/149 °F
- Process fluid-T: max. +65°C / +149 °F
- Process pressure: max. 75% of full scale value
- Over pressure: 25% of full scale value
- Blow-out plug: EPDM
- Protection: IP65 according IEC29
- Options on request:
  - scales for all marketable refrigerants
  - dry version without glycerine
  - other connectors

